

## Apparatus for producing molten pig iron by direct reduction

**Patent number:** EP0735146  
**Publication date:** 1996-10-02  
**Inventor:** KLAASSEN ANTONIUS ADRIANUS MAR (NL); MEIJER HENDRIKUS KOENRAAD ALBE (NL)  
**Applicant:** HOOGOEVENS STAAL BV (NL)  
**Classification:**  
 - international: C21B13/00; C21C5/56  
 - european: C21B13/00A; C21C5/56D  
**Application number:** EP19960200774 19960320  
**Priority number(s):** NL19950000600 19950329

### Also published as:

US5662860 (A1)  
 NL9500600 (A)  
 EP0735146 (B1)  
 RU2154110 (C2)  
 PL183185B (B1)

more >>

### Cited documents:

EP0209149  
 US4076954  
 GB2100755  
 US3462263  
 FR2611876  
 more >>

### Abstract of EP0735146

Apparatus for producing molten pig iron by direct reduction of iron ore, comprises (i) a metallurgical vessel (13, 14), in which with supply of coal and oxygen the iron ore undergoes a final reduction with production of a process gas and said process gas undergoes a partial post-combustion, and (ii) a melting cyclone (12) in which the iron ore undergoes a pre-reduction and is melted. To improve the control of the thermal flows and to reduce maintenance, the vessel has (a) a top part (13), in which the partial post-combustion of said process gas takes place, in the form of a pressure-resistant hood having an interior wall (17) comprising cooling water pipes, and (b) a bottom part (14) for accommodating an iron bath having a slag layer in which said final reduction of said iron ore takes place, the bottom part having an internal refractory lining (15) and means (16) for water cooling the internal refractory lining.


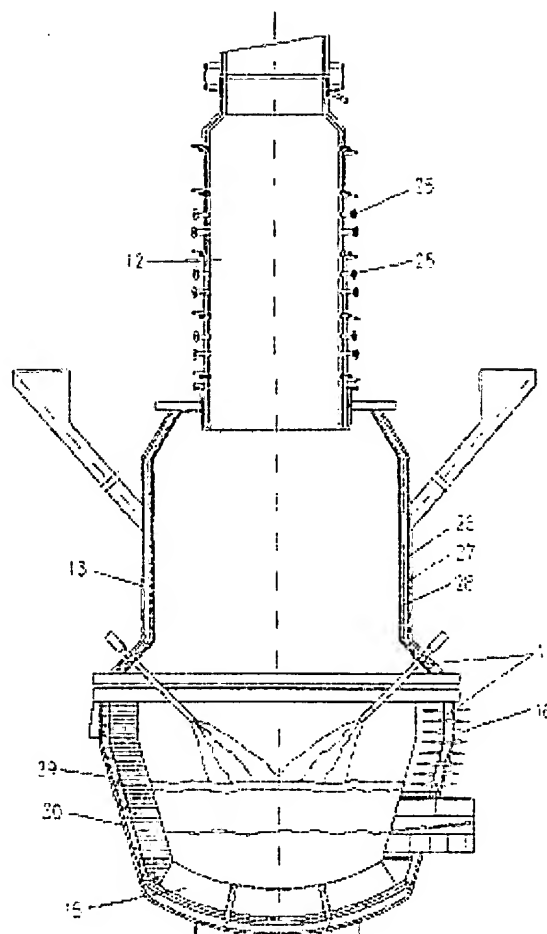


FIG. 3

---

Data supplied from the *esp@cenet* database - Worldwide



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 735 146 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.10.1996 Bulletin 1996/40

(51) Int Cl.<sup>6</sup>: C21B 13/00, C21C 5/56

(21) Application number: 96200774.6

(22) Date of filing: 20.03.1996

(84) Designated Contracting States:  
AT BE DE ES FR GB IT

• Meijer, Hendrikus Koenraad Albertus  
1911 JR Uitgeest (NL)

(30) Priority: 29.03.1995 NL 9500600

(74) Representative: Wentzel, Hendrik Cornelis et al  
Hoogovens Corporate Services BV,  
Industrial Property Department,  
P.O. Box 10000  
1970 CA IJmuiden (NL)

(72) Inventors:  
• Klaassen, Antonius Adrianus Maria  
2071 EV Santpoort-Noord (NL)

(54) **Apparatus for producing molten pig iron by direct reduction**

(57) Apparatus for producing molten pig iron by direct reduction of iron ore, comprises

(i) a metallurgical vessel (13, 14), in which with supply of coal and oxygen the iron ore undergoes a final reduction with production of a process gas and said process gas undergoes a partial post-combustion, and

(ii) a melting cyclone (12) in which the iron ore undergoes a pre-reduction and is melted. To improve the control of the thermal flows and to reduce maintenance, the vessel has

(a) a top part (13), in which the partial post-combustion of said process gas takes place, in the form of a pressure-resistant hood having an interior wall (17) comprising cooling water pipes, and

(b) a bottom part (14) for accommodating an iron bath having a slag layer in which said final reduction of said iron ore takes place, the bottom part having an internal refractory lining (15) and means (16) for water cooling the internal refractory lining.

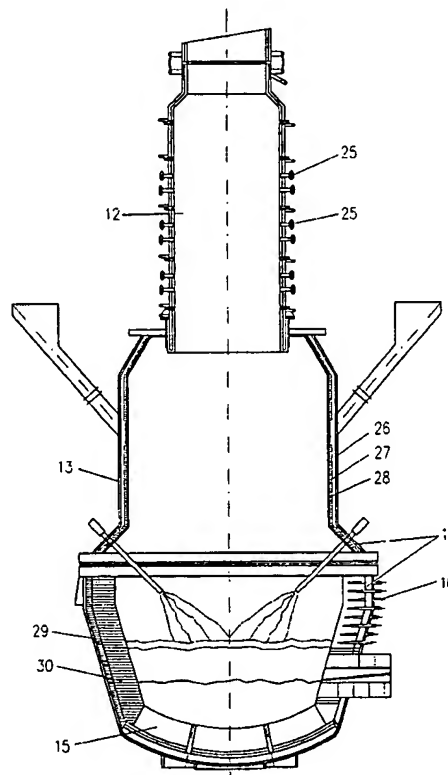


FIG. 3

EP 0 735 146 A1

## Description

### FIELD OF THE INVENTION

The invention relates to an apparatus for producing molten pig iron by direct reduction of iron ore, comprising a metallurgical vessel having means for supplying coal and oxygen thereto and in which the iron ore is finally reduced and a partial post-combustion of process gas takes place, and a melting cyclone in which the iron ore is pre-reduced and melted before transfer to the metallurgical vessel.

### DESCRIPTION OF THE PRIOR ART

An apparatus of the above type is known from NL-C-257692. A description of the CCF (Cyclone Converter Furnace) process to be carried out in such an apparatus is published in Steel Times International, part 17, no. 3, March 1993, Redhill, Surrey, GB, page 24 "Single vessel melting reduction using cyclone pre-reducer". In the Dutch patent 257692 the apparatus was described in a somewhat elementary fashion. Since then the applicant has obtained new and fuller insight into this technology.

Other proposals for direct reduction of ore are to be found in US-A-3462263, GB-A-2100755, US-A-4076954 and EP-A-209149, but these in general do not give details of the furnace and of cooling required.

In the case of an apparatus for the CCF process, several problems need to be solved. First, the pre-reduced iron ore, FeO, is very corrosive especially in the area of the slag layer in the metallurgical vessel. Secondly the slag layer has the tendency to start foaming badly, causing great differences in the level of the slag layer and consequently of the process conditions. Thirdly the oxygen and the coal should be supplied in a manner which is optimal for the process.

### SUMMARY OF THE INVENTION

The object of the invention is to provide an apparatus for the industrial application of the CCF process and which enables the process to be carried out with a low level of maintenance.

According to the present invention, the metallurgical vessel of the apparatus in accordance with the invention comprises:

- (a) a top part, in which the partial post-combustion of the process gas takes place, in the form of a pressure-resistant hood having an interior wall (e.g. a water-cooled pipe wall) comprising cooling water pipes for cooling the interior wall, and
- (b) a bottom part for accommodating the iron bath having a slag layer in which the final reduction of the iron ore takes place, the bottom part having an internal refractory lining and means for water cooling the internal refractory lining.

The water-cooled refractory lining of the bottom part of the metallurgical vessel (converter) gives an acceptable service life, while the heat loss of the post-combustion in the top part of the metallurgical vessel is absorbed by the cooling pipes.

Preferably, the top and bottom parts of said metallurgical vessel have, adjacent a mutual connection zone, a larger horizontal internal cross-sectional area than at respective zones above and below the mutual connection zone, for accommodating the slag layer, which as mentioned may be voluminous. Thus the metallurgical vessel may be widest at the zone of the slag layer.

The top and bottom parts may be readily detachable. Thus the top part may have mounting means for holding it in its operational position, and the bottom part is detachable and removable from the top part which is held in its mounting means. Only the bottom part of the metallurgical vessel then has to be removed and if desired replaced. However, if the refractory lining of the bottom part has a sufficient life-time, this easy detachability of the bottom part from the top part is not required.

Preferably the melting cyclone is mounted directly above the metallurgical vessel and is in direct open communication therewith, the flow path from the melting cyclone to the metallurgical vessel in the downward direction being essentially without narrowing of the flow cross-sectional area. This creates a very simple apparatus without internal conveyance losses.

It is preferable for the water-cooled interior wall (pipe-wall) of the top part of the metallurgical vessel to be provided internally with a refractory sprayed coating. This protects the pipe-wall against any damage of a chemical, thermal and mechanical nature.

It is likewise preferable if the refractory lining of the bottom part of the metallurgical vessel consists of a permanent lining and a wear lining, and is provided with the water cooling at least in the zone of the slag layer. This blast furnace construction, while of itself well known, is a less usual construction for a converter, and prolongs the service life of the refractory lining at its most vulnerable point, i.e. in the zone of the slag layer.

In a preferred embodiment the means for supplying oxygen to the vessel consist of a central lance, i.e. a lance extending vertically at a central region of the vessel. This allows the oxygen always to be supplied to the metallurgical vessel at the same place above the slag layer even when the level of slag layer varies.

In another preferred embodiment the means for supplying oxygen consist of a plurality of lances projecting laterally through the wall of the metallurgical vessel and during operation reaching over the top of the slag layer. This avoids any disrupting action of a central lance on the process in the melting cyclone. Preferably these lances for supplying oxygen are oriented as much as possible vertically, i.e. extend obliquely downward. This achieves the effect that the supply of oxygen to the metallurgical vessel still takes place as much as possible in the same place above the slag layer as the level of the

slag layer varies.

Preferably the means for supplying coal at least partly comprises at least one chute for lumps of coal, which projects through the wall of the top part of the metallurgical vessel. In accordance with present understanding, it is preferable for part of the coal to be supplied in the form of lumps and part in finely distributed or finely divided state. Consequently preferably the means for supplying coal comprises at least in part of at least one lance for supplying coal in finely divided state with the aid of a carrier gas, which lance preferably projects through the wall of the metallurgical vessel, so that during operation the lance preferably reaches into the slag layer. This achieves the effect that the coal is directly absorbed into the slag layer, allowing the final reduction to run better.

Finely divided coal may be supplied via a lance using a carrier gas.

#### BRIEF INTRODUCTION OF THE DRAWINGS

Embodiments of the invention will now be described by way of non-limitative example, with reference to the accompanying drawings, in which:-

Figure 1 shows an apparatus for carrying out the CCF process in accordance with known prior art (the "Steel Times International" article described above).

Figure 2 shows a first embodiment of an apparatus in accordance with the invention for carrying out the CCF process on an industrial scale.

Figure 3 shows a second embodiment of an apparatus in accordance with the invention.

Figure 4 shows the removal of the bottom part of the metallurgical vessel in the apparatus of Figure 3.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The apparatus in Figure 1 comprises a metallurgical vessel 1 of the converter type, a melting cyclone 2 and a central lance 3. The process is performed as follows. In the metallurgical vessel 1 there is an iron bath 4 with a slag layer 5 on top. Pre-reduced iron ore is finally reduced in the slag layer. To this end oxygen and coal are supplied to the metallurgical vessel 1 by means of the central vertical lance 3. In the final reduction a process gas comprising reducing CO is produced that is partially post-combusted above the slag layer 5 in the metallurgical vessel 1, whereby heat needed for the final reduction is released. The reducing process gas is further post-combusted in the melting cyclone 2 with oxygen supplied to the melting cyclone via inlet 6. Iron ore also supplied via inlet 6 is pre-reduced approximately to FeO and melted. The pre-reduced iron ore then falls or flows down into the metallurgical vessel 1. Pig iron and slag are tapped off via a tap hole 7. The process gas is discharged via an outlet 8. The process runs at a temperature ranging from 1500°C to 1800°C. The pressure in

the apparatus is in the range between 1 to 6 bars.

The apparatus of the invention shown in Figure 2 performs the same process as that of Figure 1, and need not be fully described again. The metallurgical vessel 11 comprises a top part 13 and a bottom part 14. The top part 13 is in the form of a pressure-resistant hood or cover with a water-cooled pipe-wall on its inside. The bottom part 14 is provided internally with a refractory lining 15 with water cooling 16. The water cooling 16 shown in Figure 2 is of the stove cooler type well known in itself for cooling blast furnace brickwork. The cooling arrangement is positioned above the iron bath 17 in the zone of the slag 18, in particular in the zone of the foaming slag 19. Figure 2 shows how, between its top and bottom ends, the metallurgical vessel 11 has a part 20 with an enlarged cross-section in which the foaming slag 19 is held. The metallurgical vessel 11 has a connection at 21 which permits the top part 13 to be released from the bottom part 14.

Figure 2 shows coal being supplied by means of the chute 22 projecting through the wall of the top part 13 of the metallurgical vessel 11. Oxygen is supplied by means of the lances 23 which project laterally through the wall of the metallurgical vessel 11 and which during operation extend to above the slag layer 18. In principle, the part 20 with an enlarged cross-section makes it possible to position the lances 23 more vertically. Figure 2 also shows how the iron melt 17 is being rinsed by gas 24 supplied through the bottom of the metallurgical vessel 11. The central lance 3 of Figure 1 may also be employed in the apparatus of Figure 2.

Figure 3 shows in specific aspects a more elaborated embodiment of the apparatus in accordance with the invention. It is similar to the apparatus of Figure 2, and need not be fully described again. The melting cyclone 12 is shown to have a large number of connections 25 for the supply of iron ore and oxygen, which connections form an injection pattern enabling a high degree of pre-reduction of the iron ore to be achieved with a high collection yield in the melting cyclone. At the same time the figure shows how the melting cyclone is positioned directly above the metallurgical vessel 11 and in open connection with the metallurgical vessel 11 without any narrowing of the cross-section of flow in the downward direction. Figure 3 also shows how the top part 13 comprises a pressure resistant hood 26, a water-cooled pipe-wall 27 and a refractory sprayed layer 28. The refractory lining 15 of the bottom part 14 of the metallurgical vessel 11 consists of a permanent lining 29 and a wear lining 30. In Figure 3 the water cooling 16 is of the cooling plate type, which cooling arrangement is of itself known for blast furnace brickwork yet unusual for a converter.

Figure 4 shows how the top part 13 of the metallurgical vessel 11 together with the melting cyclone 12 is fixed with the aid of a support 3 above a well 31. The bottom part 14 of the metallurgical vessel 11, having been released, can be removed by lowering it using a

lift cylinder 32 and then using a carriage 33 taking it to position 34, whereupon the bottom part of the metallurgical vessel 14 may be taken away as shown at 35 for repair of the refractory lining. After this, if so desired, a second ready prepared version of the bottom part 14 may be fitted by the reverse sequence of steps.

While the invention has been illustrated by two embodiments, it is not restricted to them, and variations and modifications are possible within the scope of the inventive concept.

## Claims

1. Apparatus for producing molten pig iron by direct reduction of iron ore, comprising

(i) a metallurgical vessel (13, 14), in which in operation of the apparatus the iron ore undergoes a final reduction with production of a process gas and said process gas undergoes a partial post-combustion,  
 (ii) means (22) for supplying coal to said metallurgical vessel,  
 (iii) means (3,23) for supplying oxygen to said metallurgical vessel, and  
 (iv) a melting cyclone (12) in which in operation of the apparatus said iron ore undergoes a pre-reduction and is melted, said melting cyclone (12) being in communication with said metallurgical vessel (13, 14) for transfer of the pre-reduced iron ore thereto and for flow of the post-combusted process gas from the metallurgical vessel,

characterised in that said metallurgical vessel has

(a) a top part (13), in which said partial post-combustion of said process gas takes place, in the form of a pressure-resistant hood having an interior wall (27) comprising cooling water pipes for cooling said interior wall, and  
 (b) a bottom part (14) for accommodating an iron bath (17) having a slag layer (18,19) in which said final reduction of said iron ore takes place, said bottom part having an internal refractory lining (15) and means (16) for water cooling said internal refractory lining.

2. Apparatus according to claim 1 wherein said top and bottom parts (13,14) of said metallurgical vessel have, adjacent a mutual connection zone, a larger horizontal internal cross-sectional area than at respective zones above and below said mutual connection zone, for accommodating said slag layer (18,19).

3. Apparatus according to claim 1 or 2 wherein said

top part (13) of said metallurgical vessel has mounting means (30) for holding it in its operational position, and said bottom part (14) is detachable and removable from said top part held in said mounting means therefor.

4. Apparatus according to any one of claims 1 to 3 wherein said melting cyclone (12) is mounted directly above said metallurgical vessel (13,14) and is in direct open communication therewith, the flow path from the melting cyclone to the metallurgical vessel in the downward direction being essentially without narrowing of the flow cross-sectional area.

5. Apparatus according to any one of claims 1 to 4 wherein said interior wall (27) of said top part of said metallurgical vessel is provided internally with a sprayed-on refractory coating (28).

6. Apparatus according to any one of claims 1 to 5 wherein said internal refractory lining (15) of said lower part (14) of said metallurgical vessel comprises a permanent lining (29) and a wear lining (30) and said means (16) for water cooling thereof is arranged to cool at least the zone thereof at which said slag layer (18,19) is formed in operation.

7. Apparatus according to any one of claims 1 to 6 wherein said means for supplying oxygen to said metallurgical vessel comprises a central oxygen lance (3).

8. Apparatus according to any one of claims 1 to 7 wherein said means for supplying oxygen to said metallurgical vessel comprises a plurality of oxygen lances (23) projecting laterally into the interior of the metallurgical vessel and extending over the top of said slag layer in operation.

9. Apparatus according to claim 8 wherein said oxygen lances (23) extend obliquely downwardly to their discharge ends.

10. Apparatus according to any one of claims 1 to 9 wherein said means for supplying coal to said metallurgical vessel comprises at least one chute (22) for supplying coal in the form of lumps, projecting through said internal wall of said top part of said metallurgical vessel.

11. Apparatus according to claim 1 wherein said means for supplying coal to said metallurgical vessel comprises at least one coal lance (3) for supplying finely divided coal and a carrier gas therefor.

12. Apparatus according to claim 11 wherein said coal lance (3) extends into the zone of said slag layer in operation.

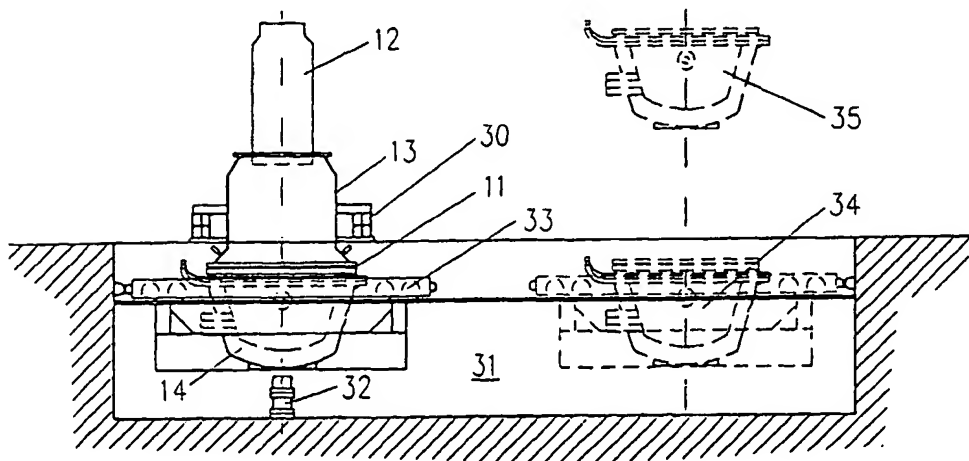
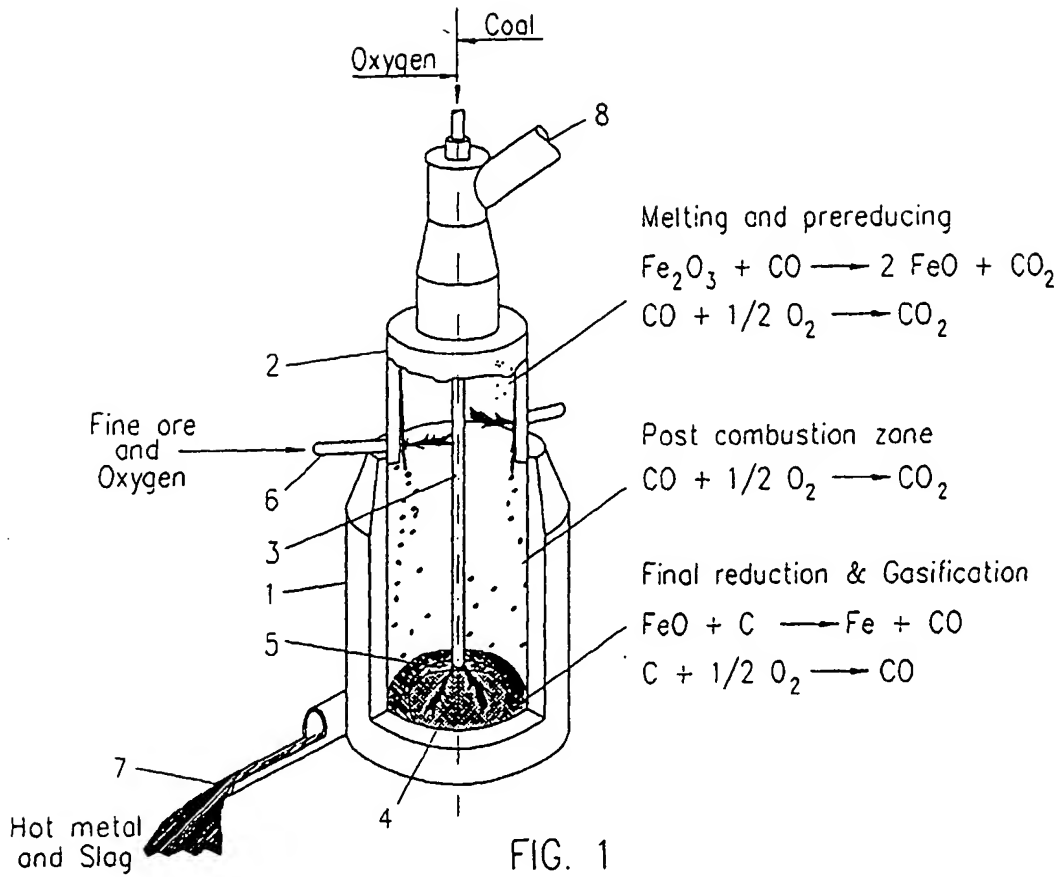


FIG. 4

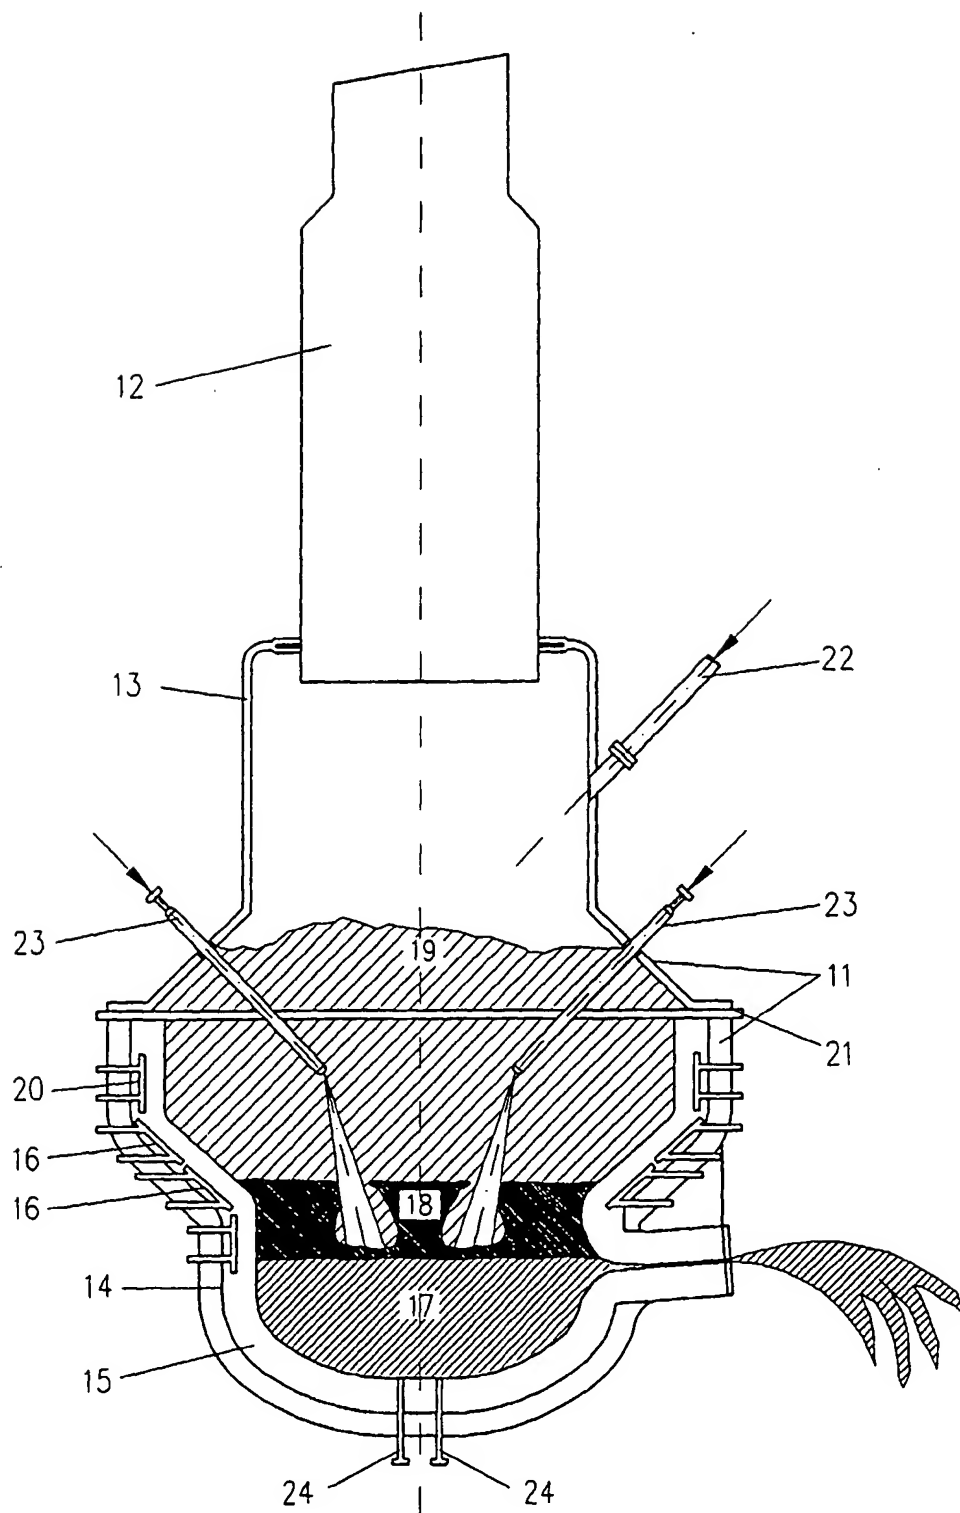


FIG. 2



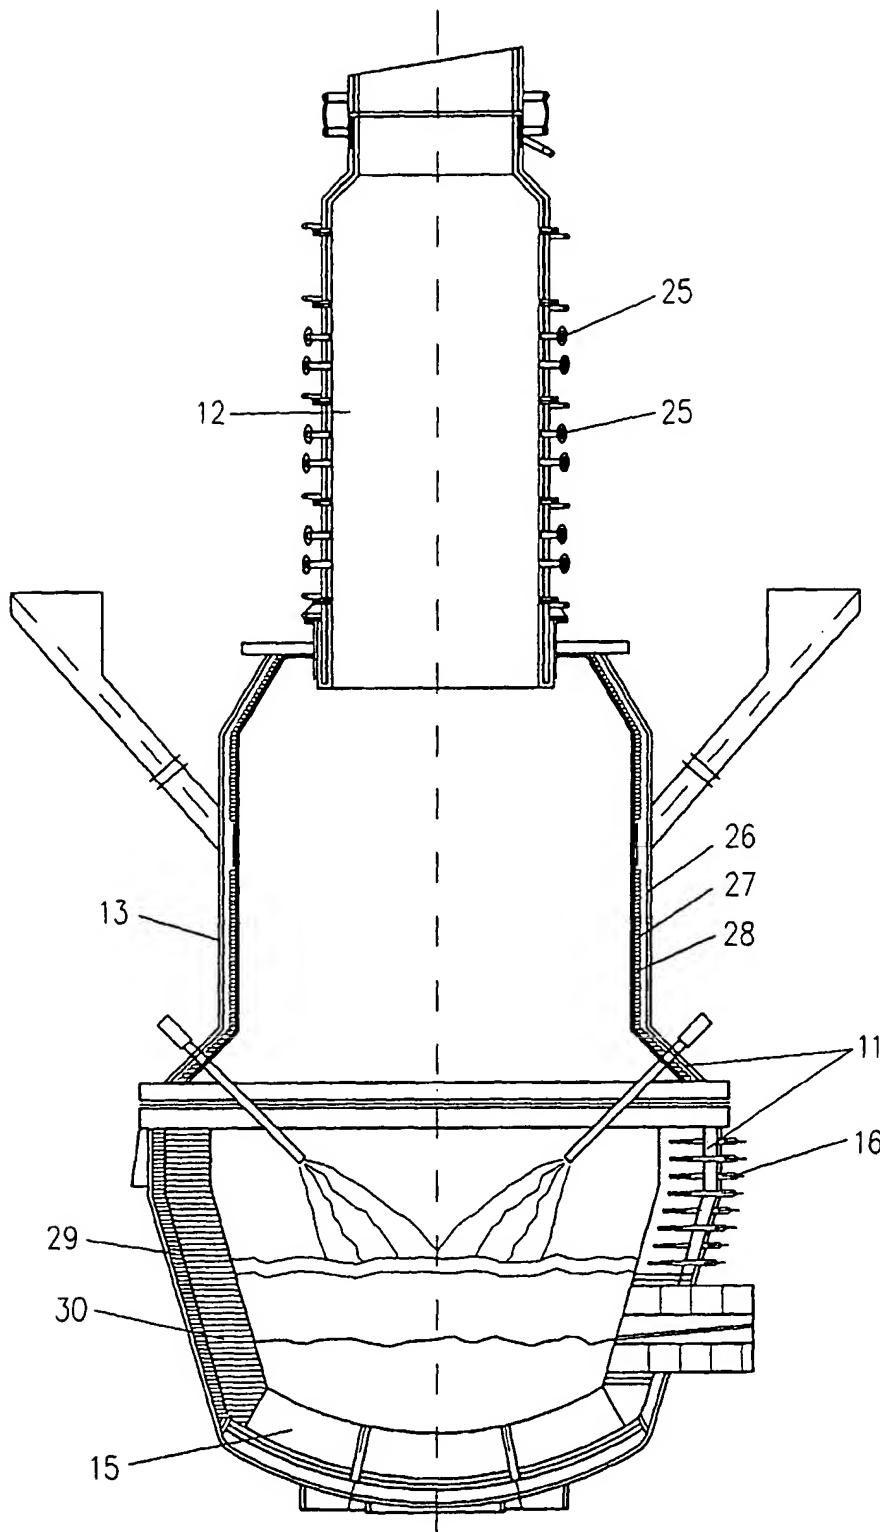


FIG. 3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 96 20 0774

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.6)
A, D	STEEL TIMES INTERNATIONAL - INCORPORATING IRON & STEEL INTERNATIONAL, vol. 17, no. 2, March 1993, ENGLAND GB, page 24 XP000360447 NN: "Single vessel smelting reduction using cyclone-preheater" * the whole document*	1	C21B13/00 C21C5/56
A	EP-A-0 209 149 (KOBEL STEEL LTD) 21 January 1987		
A	US-A-4 076 954 (LINDER ROLF) 28 February 1978		
A	GB-A-2 100 755 (SUMITOMO METAL IND) 6 January 1983		
A	US-A-3 462 263 (WALSH JOHN H ET AL) 19 August 1969		
A	FR-A-2 611 876 (CLECIM SA) 9 September 1988		
A	REVUE DE METALLURGIE, vol. 90, no. 3, March 1993, PARIS FR, pages 363-368, XP000369721 JU.VAN LANGEN ET AL.: "The cyclone converter furnace"		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. CL.6)
			C21B C21C F27B
Place of search THE HAGUE		Date of completion of the search 8 July 1996	Examiner Oberwalleney, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 150 (02/92) P04(01)